


**GLOBAL SYN-TURF** 5960 Inglewood Dr. #150 Pleasanton, CA 94588 TOLL FREE: 1-877-796-8873 FAX: (510) 732-6188

www.globalsynturf.com



SOD STAPLE 6" x 1" x 6"

DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

**SPECIFICATIONS** 

YARN TYPE POLYETHYLENE BLADE THATCH YARN TYPE POLYPROPYLENE CURLED AS

THATCH

PILE HEIGHT 1 1/2"

TURF GAUGE 3/8"

FACE WEIGHT 51 OZ YD

BACKING WEIGHT 23 OZ YD

TOTAL WEIGHT 74 OZ YD2

STITCH RATE 15/10 CM

STITCHES/M<sup>2</sup> 15750


COLOR FIELD GREEN AND OLIVE

GREEN WITH BROWN AND

**GREEN THATCHING** 

ROLL SIZE (FEET) 15' x 100'

MAXIMUM DRAIN RATE > 30 INCHES PER HOUR

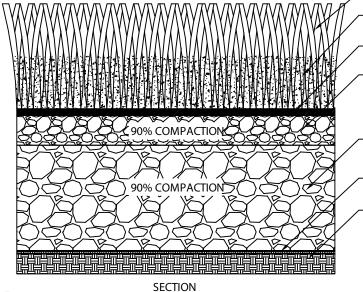



**SEAMING** SOD STAPLES ARE **RECOMMENDED TO SEAM** THE SEAMS



**SECURING TURF TO BASE BRIGHT COMMON 40D/60D** NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER SEAMS.



**POWER BROOM AFTER INSTALLATION IS COMPLETE** 

OLIVE-51 **INFILL** 

WEED BARRIER

1 - 1 1/2" DECOMPOSED

**GRANITE OR CLASS II** 

2 - 2 1/2" DRAIN ROCK

(OPTIONAL)

**ROAD BASE** 

**WIRE MESH** 

(OPTIONAL)

SOIL (GROUND)

NOTES:

- 1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
- 2. COLOR: FIELD GREEN AND OLIVE GREEN WITH BROWN ANDD GREEN THATCHING.
- 3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 4. DO NOT SCALE DRAWING.
- 5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

