

# GLOBAL SYN-T

#### **Product Specification Sheet**

## **Premium M Blade-60**





#### R USES


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

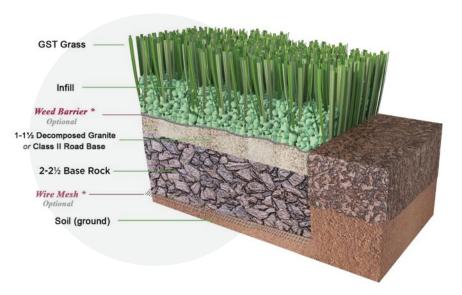

#### M SHAPE BLADE

### **SPECIFICATIONS**

Pile Height: 1-3/4"

Turf Gauge: 3/8"

Face Weight: 60 oz./yd<sup>2</sup>

Backing Weight: 30 oz./yd2

Total Weight: 90 oz./yd<sup>2</sup>

Stitch Rate: 12/10cm

Stitches/M<sup>2</sup>: 12600

Material/Dtex: PE11200 + PP4000

Color: Field Green and Lime Green with Brown and Green Thatching

Type Of Fiber: PE monofilament and PP Curled

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 12 lb/force (ASTM D1335)

Blade Type: M Shape Blade

Permeability: 97.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 929 lbs





