

GLOBAL SYN-T

Product Specification Sheet

UltraReal





□ USES


- Playgrounds
- **Parks**
- Soccer Field
- Football Field
- **General Sports Fields**
- Commercial or Residential
- Medium-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

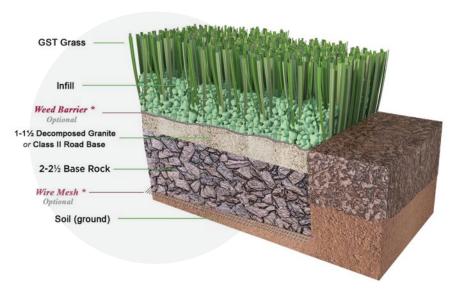

DIAMOND BLADE | S BLADE LITTLE S BLADE | W BLADE



SPECIFICATIONS

Pile Height: 2"

Turf Gauge: 3/8"

Face Weight: 65 oz./yd²

Backing Weight: 28 oz./yd²

Total Weight: 93 oz./yd²

Stitch Rate: 10.5/10cm

Stitches/M²: 11025

Material/Dtex: PE13000 + PP4500

Color: Field Green, Apple Green, Olive Green and Brown Green with Brown and Green Thatching

Type Of Fiber: PE Monofilament and PP Curled As

Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 13+ lb/force (ASTM D1335)

Blade Type: Diamond Blade, S Blade, Little S

Blade, W Blade

Permeability: 91.5 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: **1500**

Total Roll Weight: 1005 lbs





