GLOBAL SYN-TURF

GREENING PLANET EARTH

Product Specification Sheet

C Blade-92

USES

- Landscape
- Lawns
- Playgrounds
- Traffic Medians
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic

15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty

Flo-Rite Drainage Technology

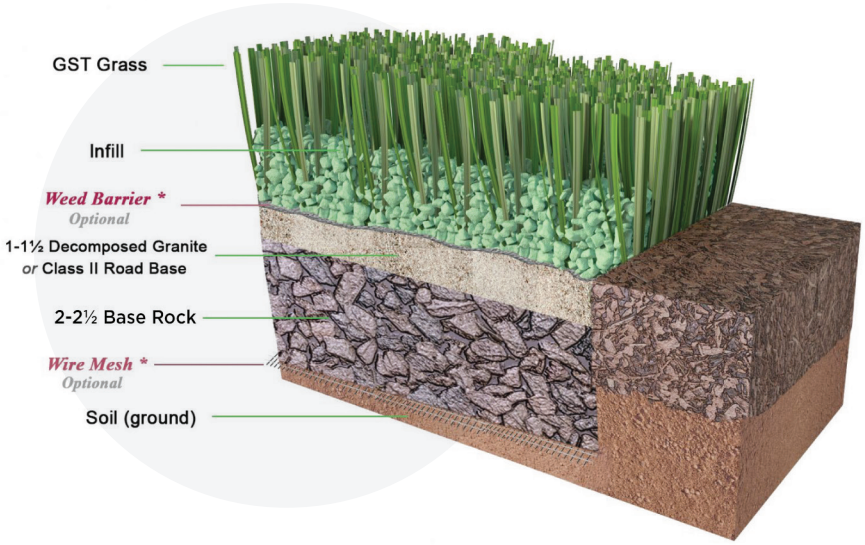

C-SHAPE BLADE

SPECIFICATIONS

Pile Height: **1.75"**
Turf Gauge: **3/8"**
Face Weight: **92 oz./yd²**
Backing Weight: **26 oz./yd²**
Total Weight: **118 oz./yd²**
Stitch Rate: **20/10cm**
Stitches/M²: **19425**
Material/Dtex: **PE/PP16400**
Color: **Emerald Green and Olive Green with Brown and Green Thatching**
Type Of Fiber: **PE Monofilament and PP Curled As Thatch**
Infill Amount: **1.0 lb./psf.**
Primary Backing: **Premium GST Backing**
Tuft Bind: **11+ lb/force (ASTM D1335)**
Blade Type: **C-Shape Blade**
Permeability: **120 inches/hr. (ASTM F1551)**
Melting Point: **150 °C (ASTM D2859)**
Grab Tear MD: **>200 lb./force (ASTM D5034)**
Grab Tear CMD: **>200 lb./force (ASTM D5034)**
Roll Width: **15 lf**
Roll Length: **75 lf**
Sq. Ft. Per Roll: **1125**
Total Roll Weight: **952 lbs**

LEAD

5960 Inglewood Drive, Ste.150, Pleasanton, 94588, USA
Telephone: **510-732-2300** | Fax: **510-732-6188** | Toll Free: **877-SYN-TURF (796-8873)**
www.**globalsynturf**.com | Email: **info**@globalsynturf.com