




GLOBAL SYN-TURF
GREENING PLANET EARTH

Product Specification Sheet



Sierra Pro-70

USES


- ▶ Landscape
- ▶ Lawns
- ▶ Playgrounds
- ▶ Traffic Medians
- ▶ Pet Areas
- ▶ Commercial or Residential
- ▶ Light-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

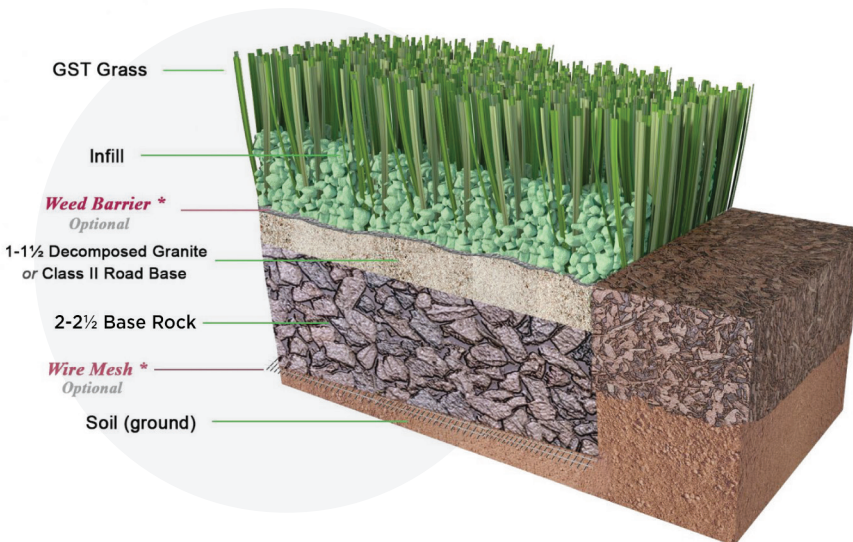

DIAMOND BLADE

SPECIFICATIONS

Pile Height: 1-¾"

Turf Gauge: 3/8"

Face Weight: 70 oz./yd²

Backing Weight: 37 oz./yd²

Total Weight: 107 oz./yd²

Stitch Rate: 12/10cm

Stitches/M²: 12600

Material/Dtex: PE13000 + PP5000

Color: 2/3 Field Green and 1/3 Lime Green with Brown and Green Thatching

Type Of Fiber: PE Monofilament and PP Curled As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 14+ lb./force (ASTM D1335)

Blade Type: Diamond Blade

Permeability: 46.4 inches/hr. (ASTM F1551)

Melting Point: 150 °C (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 1047 lbs

