

# GLOBAL SYN-T

### **Product Specification Sheet**







#### **III USES**


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

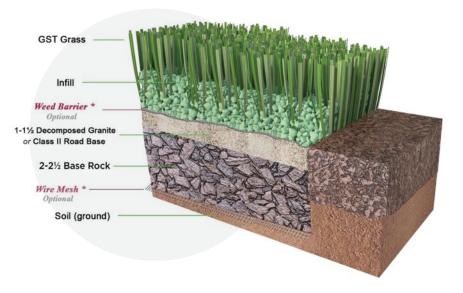

#### DIAMOND BLADE

## **SPECIFICATIONS**

Pile Height: 2-3/8"

Turf Gauge: 3/8"

Face Weight: 95 oz./yd<sup>2</sup>

Backing Weight: 26 oz./yd2

Total Weight: 121 oz./yd<sup>2</sup>

Stitch Rate: 13/10cm

Stitches/M2: 13650

Material/Dtex: PE13000 + PP5000

Color: 2/3 Field Green and 1/3 Lime Green with

**Brown and Green Thatching** 

Type Of Fiber: PE Monofilament and PP Curled

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 14+ lb/force (ASTM D1335)

Blade Type: Diamond Blade

Permeability: 56.1 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 1153 lbs





